(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 7 July 2005 (07.07.2005)

PCT

(10) International Publication Number WO 2005/061787 A1

(51) International Patent Classification⁷:

D21F 7/08

(21) International Application Number:

PCT/US2003/039438

(22) International Filing Date:

11 December 2003 (11.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): ALBANY INTERNATIONAL CORP. [US/US]; 1373 Broadway, Albany, NY 12204 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HANSEN, Robert, A. [US/DE]; Alte Dorfstrasse 62, 70599 Stuttgart-Birkach (DE).
- (74) Agent: SANTUCCI, Ronald, R.; Frommer Lawrence & Haug LLP, 745 Fifth Avenue, New York, NY 10151 (US).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PASSIVE SENSOR SYSTEM FOR DETECTION OR WEAR PROBLEMS IN PAPER MACHINE CLOTHING

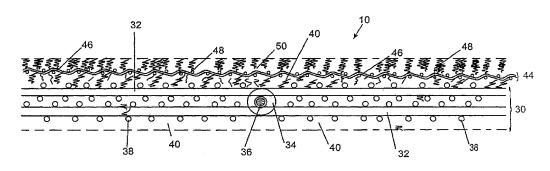

(57) Abstract: A stratified press fabric (10) for the press section of a paper machine having a passive sensor system for detecting wear in the press fabric (10). The lower (non-surface) layer(s) (40) of the stratified press fabric are produced using colored staple fiber batt material. As the surface of the fabric (50) is worn away through use, the colored batt material is exposed to provide a visual indication of the wear. This visual indication allows the customer to readily determine the appropriate time to replace the press fabric.

